

Additional Web Setting Functions

The following 3 functions are added. Available functions vary depending on the firmware version.

1. **[Android audio streaming] setting (Firmware version 1.9598.583 and later)**
2. **[HDMI-CEC control] – [Input Change Timing] setting (Firmware version 1.9598.583 and later)**
3. **[Signal Strength] setting (Firmware version 1.12412.676 and later)**


Selection items are added in the following menu.

4. **[Screen Saver] setting (Firmware version 1.9598.583 and later)**

1. [Android audio streaming] setting (Firmware version 1.9598.583 and later)

Specifies whether to output the audio of Android from the display device connected to the receiver.


Select **[Android audio streaming]** on the **[Device Management]** screen of the **Web setting menu**.

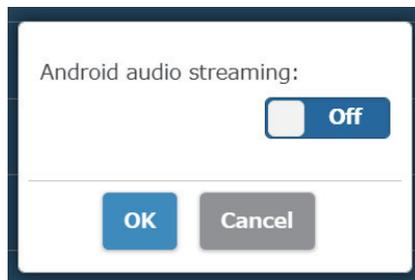

On: Enables the function.
Off: Disables the function.

■ About [PressIT] app

Displays the audio output status using the Android app dedicated to [PressIT]. (App version 0.0.14 and later)

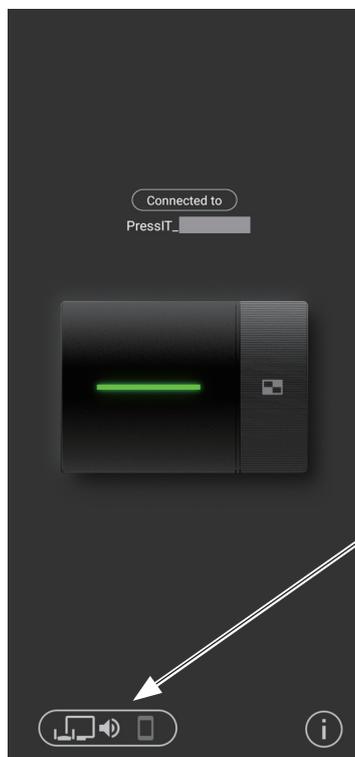

Audio output status display added



Audio output on the Android device



Audio output on the display/projector


Note

- Since this function uses the Bluetooth function on the Android device, enable Bluetooth on the setting menu.

2. [HDMI-CEC control] – [Input Change Timing] setting (Firmware version 1.9598.583 and later)

Specifies the function to turn the power ON or switch input of the device connected to the receiver for each operation.

Select [HDMI-CEC control] on the [Device Management] screen of the Web setting menu.

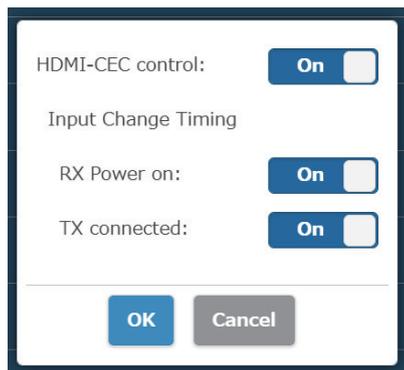

Input Change Timing

RX Power on:

Sets the function to turn the power ON or switch input when the receiver is turned on.

On: Enables the function.

Off: Disables the function.

TX connected:

Sets the function to turn the power ON or switch input when the transmitter is turned on.

On: Enables the function.


Off: Disables the function.

3. [Signal Strength] setting (Firmware version 1.12412.676 and later)

Sets the strength.

Configure this setting to suppress the interference of radio waves generated when multiple transmitters and receivers are installed in proximity.


① Select [Signal Strength] on the [Detail Settings] screen of the Web setting menu.

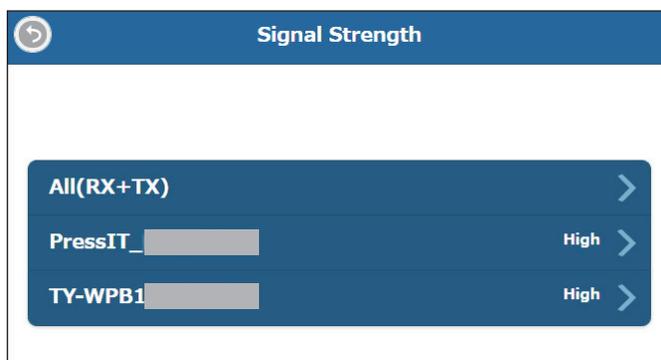

The transmitters connected to the receiver are displayed in the list. Select a device to be set.

To apply the same setting to the receiver and all transmitters, select [All(RX+TX)].

② Set the strength.

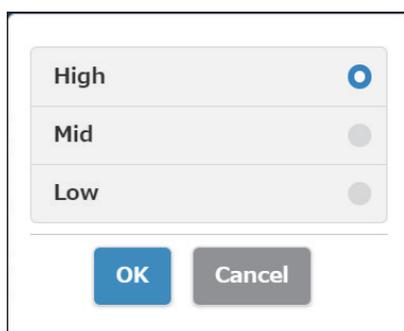


High: Sets the strength of the wireless to the maximum.

Mid: Sets the strength to 70%.

Low: Sets the strength to 40%.

③ Set reboot.

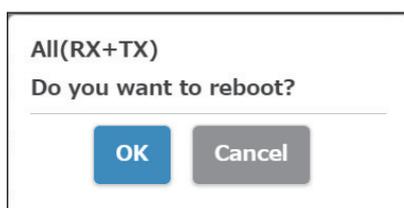

Set whether to reboot the device of which the setting has been changed.


When changing the settings of multiple devices in succession, select [Cancel].

Note

- Reboot is applicable only to the device for which the setting is changed just before the reboot.
- When settings for multiple devices are changed by selecting [Cancel], turn off and on the power manually.

4. [Screen Saver] setting (Firmware version 1.9598.583 and later)

[1 Minutes] and [5 Minutes] are added to the selection items.

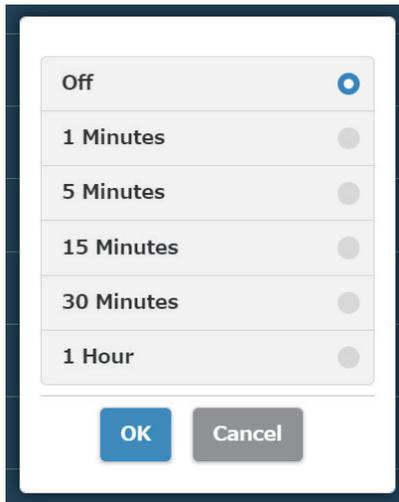

The image shows a screenshot of a settings dialog box for a screen saver. The dialog box has a white background and a dark blue border. It contains a list of options with radio buttons to the right of each option. The options are: "Off", "1 Minutes", "5 Minutes", "15 Minutes", "30 Minutes", and "1 Hour". The "Off" option is currently selected, indicated by a blue dot in the radio button. Below the list, there are two buttons: a blue "OK" button and a grey "Cancel" button.

Off	<input checked="" type="radio"/>
1 Minutes	<input type="radio"/>
5 Minutes	<input type="radio"/>
15 Minutes	<input type="radio"/>
30 Minutes	<input type="radio"/>
1 Hour	<input type="radio"/>

OK Cancel