

Panasonic®

Operating Instructions

Replacement Filter Cartridge Commercial Use

Model No. **ET-ACF310**

Thank you for purchasing a Panasonic product.

■ Read this manual and the projector manual completely, and use this product correctly and safely.

※All the projector illustrations in this manual are based on PT-DZ8700U and PT-DZ110XE model.


※The full name of this product is [Replacement Filter Cartridge], and name [ACF unit] will be used when it is installed to the projector.

■ Before replacing the parts


- Turn off the main power of the projector and remove the power plug from the power socket when replacing the cartridge.
- Follow the procedures in the “Powering off the projector” section in the projector’s Operating Instructions manual when turning off the projector.

■ Replacing the ACF unit.

- (1) Loosen the [ACF unit cover screw] (one screw) until the screw turns freely in counterclockwise direction and remove the [ACF unit cover].

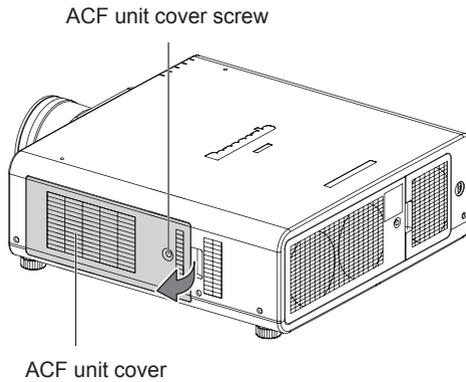


- (2) Remove the [ACF unit] from the projector.

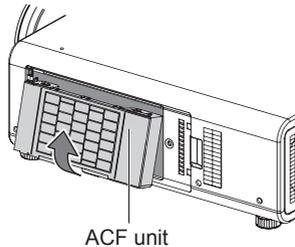

- After removing the [ACF unit], clean dust and other foreign objects from the vents of the ACF unit and the projector.
- (3) Insert the new [ACF unit] (the [replacement filter cartridge] of this product) into the projector firmly.
 - (4) Secure the [ACF unit cover] with the [ACF unit cover screw] tightly.

- (5) After the [ACF unit] is replaced, turn on the projector, select [REMAINING FILTER QUANTITY] in the [PROJECTOR SETUP] menu, select [OK] and then press <ENTER> button.

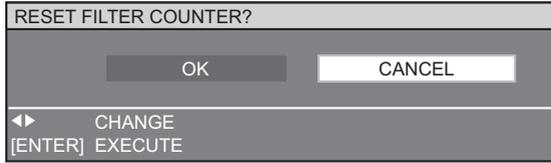


Attention:

- Please only use the projector with the ACF unit installed.
- Please replace the ACF unit only with new and unused units.

Note:

- The projector will automatically shut down after 10 minutes if the ACF unit is not installed, as dust and foreign objects may get inside it and cause operating problems.
(The time of shutting down is shown in unit of 1 minute in the on-screen.)
- The time period to replace the ACF unit will depend on the operating environment.
- The winding up of the filter will start during reset.
The <Filter Monitor> in front of the projector will blink in green during winding up.
The <Filter Monitor> will stop blinking when the winding up has finished.
Sounds of the winding up action might be heard.

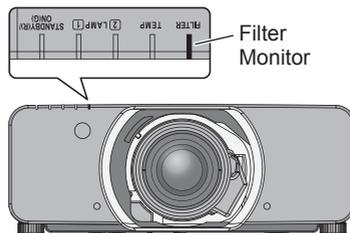

Information on Disposal

When discarding the product, please contact your local municipality or the point of sale where you purchased the items for the proper disposal methods.

Panasonic Corporation

Web Site : <https://panasonic.net/cns/projector/>
© Panasonic Corporation 2010

SS0710AM1047 -PS