

Professional Displays

Standard

SQ2H <small>*Actual Resolution: 3840 x 2160p</small>	TH-98SQ2H	700cd/m ²			
	TH-86SQ2H	700cd/m ²			
	TH-75SQ2H	700cd/m ²			
	TH-65SQ2H	700cd/m ²			
	TH-55SQ2H	700cd/m ²			
	TH-50SQ2H	700cd/m ²			
	TH-43SQ2H	700cd/m ²			




SQE2 <small>*Actual Resolution: 3840 x 2160p</small> <small>•DisplayPort (Ver. 1.2)</small>	TH-98SQE2	500cd/m ²			
	TH-86SQE2	500cd/m ²			
	TH-75SQE2	500cd/m ²			
	TH-65SQE2	500cd/m ²			
	TH-55SQE2	500cd/m ²			
	TH-50SQE2	500cd/m ²			
	TH-43SQE2	500cd/m ²			

Entry

CQE2 <small>*Actual Resolution: 3840 x 2160p</small>	TH-98CQE2	500cd/m ²			
	TH-86CQE2	400cd/m ²			
	TH-75CQE2	400cd/m ²			
	TH-65CQE2	500cd/m ²			
	TH-55CQE2	500cd/m ²			
	TH-50CQE2	500cd/m ²			
	TH-43CQE2	500cd/m ²			

Model Number Legend



Pict Descriptions

 4K display <small>(Actual resolution: 3840 x 2160p)</small>	 Capable of 24-hour continuous operation	 Capable of 16-hour continuous operation
 USB media player supporting 4K images	 Portrait installation possible	 Intel® SDM specification compatible slot

Pitch for wall hanging is VESA compliant

NOTE: The availability varies depending on model.
The specifications are subject to change without notice.



For more information about Panasonic Professional Displays, please visit:
Display Global Website: <https://docs.connect.panasonic.com/prodisplays/>

Wireless Presentation System

PressIT WPS2 Series



Note: The transmitter and receiver are also available separately.

Basic set		Transmitter	
TY-WPS2	TY-WPSC2	TY-WPB2	TY-WPBC2
x 2	x 2	x 1	x 1

360 Degree Camera Speakerphone




PressIT360



TY-CSP1



Equipped with various video modes

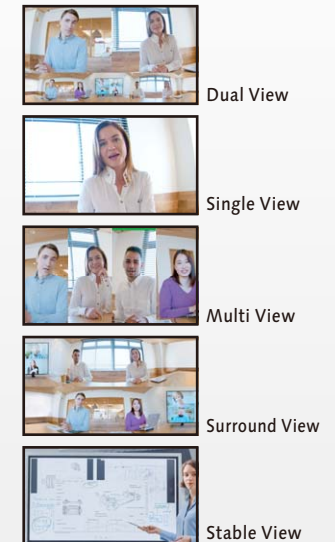

Dual View

Single View

Multi View

Surround View

Stable View