

Network Disk Recorder

H.265/H.264 high-throughput featuring integrated GUI and robust embedded IP security enabling a secure end-to-end PC-less surveillance solution for mission-critical applications.

Supports full data encryption streaming recording for all i-PRO cameras which comply to FIPS 140-2 Level 1 standards to keep your video secured from spoofing and snooping activities.

Built-in PoE and Space saving

- 4 PoE ports ready, no need to prepare a separate switching hub.
- Space saving in a compact size (24% reduction in capacity compared to WJ-NX200)

Secure communication and high compression recording

- Pre-installed 2.5" HDD 2 TB (Max. 4 TB)
- Significant reduction of storage space usage through H.265 and Smart Coding.
- 4 ch. camera input. Supports H.265 / H.264 mixed recordings
- Pre-installed device certificates *Secure Communication Kits are necessary.

PC-less non-VMS surveillance solution

- No annual license updates required.
- Built-in GUI and HDMI (4K/FHD) outputs
- Automatic camera configuration
- Image search with thumbnails
- High-speed copy to USB storage

High efficiency data reading/writing

- ECO-writing: Acceleration of data access (reading/writing) by original file system



*ONVIF is a trademark of ONVIF, Inc.

Specifications

Supported Camera	Compatible vendor	i-PRO series Network cameras, ONVIF NVT conformant camera and encoder	
	Supported Image Format	H.265 (HEVC), H.264, JPEG	
	Supported Image Resolution (Depending on the camera)	Aspect ratio [4 : 3] 4000x3000, 3072x2304, 2560x1920, 2048x1536, 1280x960, 800x600, 640x480 Aspect ratio [16 : 9] 3840x2160, 3072x1728, 2560x1440, 1920x1080, 1280x720, 640x360 Aspect ratio [1 : 1] 2992x2992, 2816x2816, 2192x2192, 2048x2048, 1280x1280 Aspect ratio [9 : 16] 2160x3840, 1728x3072, 1440x2560, 1080x1920, 720x1280, 360x640	
	Supported Audio Format	G.711 for Onvif, G.726 (ADPCM) 32 kbps, AAC-LC	
Recording	Maximum Number of Cameras	MAX. 4	
	Recording Mode	Event, Schedule, Emergency	
	Pre-alarm Recording	Up to 15 seconds *When the delivery speed from the network camera is less than 4 Mbps.	
	Sub-stream Recording	64 / 128 / 256 / 384 / 512 / 768 kbps	
	Scheduled Recording Mode	4 programs, 6 time zones/day, Independent setup for each day of the week	
	Frame Rate/Camera	Up to 60 fps (Depending on the camera)	
Main Unit Functions	Camera Control	Pan/Tilt, Zoom, Focus, Brightness, Preset position call and program (up to 256), Auto mode, Click centering, Wheel zoom, Zoom reset, Auto Back Focus, Aux, Wiper (for WV-SUD638)	
	Multiscreen Mode	[Main monitor] • Control screen 4 split screen display • Wide view screen 2 / 3 / 4 split screen display, 1 screen sequence [Sub monitor] 1 screen sequence, 4 split screen display	
	Playback Control	PLAY, Rev PLAY, Pause, Stop, FF, FR, Prev Record, Next Record, Prev Image, Next Image, Go to Date, Go to Last (30 s), Time-saving playback	
	Search Mode	Search criteria: Time date, Playback by designating a timeline, VMD, Thumbnail	
	Copy	File Format: Original Format / MP4 Recorded data of selected cameras and time date range can be copied to USB storage.	
	Camera Title	Up to 16 Characters	
	Clock Display	Time : 12H/24H, Date : 5 formats	
	Digital Zoom	Live / Play: 1.25x 1.5x 1.75x, 2x, 2.5x, 3x, 3.5x 4x, 5x, 6x, 7x, 8x (only for 1-screen or 4-screen)	
	System Log	Operator access (500), Network error (100), Error (1,000), Event (1000), Operation (500)	
	System Setup	Setup page in English, French, Italian, Spanish, German, Russian, Portuguese, Thai, Simplified Chinese, Traditional Chinese, Japanese	
	360 Camera Dewarp	Only 1ch display mode.	
	re-encoding	2Client	
	SD Memory Data Download	Images recorded in the SD card in the i-PRO series cameras can be transferred to the recorder automatically. (H.265/H.264)	
	Browser GUI	Camera Control	Pan/Tilt, Zoom, Focus, Brightness, Preset position call and program (up to 256), Auto mode, Click centering, Wheel zoom, Zoom reset, , Aux, Wiper (for WV-SUD638)
		Playback Control	PLAY, Rev PLAY, Pause, Stop, FF, FR, Prev Record, Next Record, Prev Image, Next Image, Go to Date, Go to Last (30 s)
		Search Mode	Search criteria: Time date, Event type, VMD, Camera number
		Display Mode	1 / 4 screen
Image Download		File Format: Original Format / MP4 Recorded data of selected camera and time range can be downloaded to a PC. Viewer software can be downloaded separately.	
Copy		File Format: Original Format / MP4 Recorded data of selected cameras and time date range can be copied to USB storage.	
Camera Title		Up to 16 characters	
Clock Display		On the browser. Time: 12H/24H, Date: 5 formats	
Alarm Control		Reset	
Digital Zoom		Live/Play: 2x, 4x (only for 1-screen)	
System Log		Operator access (500), Network error (100), Error (1,000), Event (1000), Operation (500)	
GUI Language		Setup page in English, French, Italian, Spanish, German, Russian, Portuguese, Thai, Simplified Chinese, Traditional Chinese, Japanese	
Required PC		CPU: Intel® Core™ i7-860 or faster, RAM : 4 GB or more, VRAM: 128 MB or more (Min. 64 MB), Microsoft® Directx® 9.0c or later	

Alarm/Event	Alarm Source	2x Terminal inputs, 4x Camera alarms (TCP alarm notification), 128x Command alarms	
	Event Mode	Off / On	
	Alarm Action	Alarm recording, e-mail notification, Alarm message, Camera positioning, Terminal output, TCP alarm notification output, Buzzer, Indicator	
	Alarm Control	Reset	
Input / Output	Event log	1000	
	Spot Output Connector	1x 1 V [p-p] / 75 Ω (BNC) NTSC / PAL (selectable in setup menu)	
	Monitor (HDMI) Connector	[Main monitor] HDMI 4K UHD (3840x2160p) / 30Hz, 4K UHD (3840x2160p) / 25Hz, 1920x1080p / 60Hz, 1920x1080p / 50Hz, 1920x1080i / 60Hz, 1920x1080i / 50Hz	
	Alarm / Control Terminal	Alarm input 1 - 2 ¹ , Alarm output ² Time adjustment input/output ¹ , +5 V output ³ , Emergency recording input, Face matching output ⁴ HDD error / Recording error output ² , Camera error output ²	
	Mouse Connection Port	1 (USB 2.0)	
	Network Port (PC)	10BASE-T / 100BASE-TX / 1000BASE-T (RJ45)	
	Network Port (Camera)	4x 10BASE-T / 100BASE-TX (RJ45), PoE (IEEE802.3af compliant), PoE Budget (61.6W, 4x 15.4W/port)	
	USB Storage	USB 3.0 / USB 2.0 memory, USB 3.0 / USB 2.0 connected HDD (except bus powered device)	
	Network	Network Interface	10BASE-T / 100BASE-TX / 1000BASE-T (RJ45)
		Maximum Recording Rate	96 Mbps or less
Maximum Band Width		Total 192 Mbps or less	
Supported Protocol		IPv4: TCP/IP, UDP/IP, HTTP, HTTPS, FTP, SMTP, DNS, NTP, SNMP, RTP, RTSP, ICMP, ARP IPv6: ICMPv6	
E-mail		Upon Alarm or Warning	
No. of Simultaneous Users		16 or less	
User Registration		Up to 32 users	
User Level		3 Levels (Programmable)	
Partitioning		User level - Camera (View & Control, No Access)	
Security Method		User authentication (ID and Password), Host authentication, Alteration detection, SSL/TLS	
Other Functions	Time Synchronization	Terminal (Slave), NTP (Server/Client)	
	Summer Time	User definable (using menu setup)	
	Remote Monitoring on Smartphone/Tablet	16 clients or less ⁵	
	HDD	Type	2.5 inch Serial ATA HDD, Up to 2x HDDs can be installed.
Maximum Capacity		Up to 4 TB will be supported. ⁶ (Installed HDD : 2 TB x 1)	
RAID		RAID 1	
Viewer Software	Playback Control	PLAY, Rev PLAY, Pause, FF, FR, Prev Record, Next Record, Prev Image, Next Image	
	Additional Functions	Alteration detection, Save as JPEG, Two times zoom, Print, Copy, Aspect ratio switching, fish eye correction, corridor display	
	Supported OS, Language	Language of the software will be English or Japanese	
General Specifications	Safety / EMC Standard	cUL (UL62368-1 3Ed), FCC Part15 ClassA CE (EN62368-1, EN55032 ClassB, EN55035)	
	Power Source	100 V AC to 240 V AC 50 Hz/60 Hz (included AC power adapter)	
	Power Consumption	DC48 V 1.875 A approx. 81.6 W	
	Ambient Operating Temperature	Main body : +5 °C to +45 °C (41 °F to 113 °F) Mouse (provided) : +5 °C to +40 °C (41 °F to 104 °F)	
	Ambient Operating Humidity	5 % to 90 % (without condensation)	
	Maximum Operating Altitude	2,000 m (6,562 feet) above sea level	
	Dimensions	280 mm(W) x 44 mm(H) x 212 mm(D) {11-1/32 inches (W) x 1-23/32 inches (H) x 8-11/32 inches (D)}	
	Mass (approx.)	When a HDD is installed: 1.9 kg (4.4 lb) When 2 HDD are installed: 2.0 kg (4.6 lb)	

*1 Non-voltage make contact input, +3.3 V pull-up Approx. 23 kΩ

*2 Open collector output, 24 V DC, -200 mA max.


*3 +5V ±0.5 V 200 mA max.

*4 Additional Business Intelligence Kit WJ-NXF02W is necessary.

*5 i-PRO Mobile APP is required on smartphone/tablet PC.

*6 Please check the following URL for the latest information. (<https://i-pro.com/global/en/surveillance/training-support/documentation-database-list>)

Appearance

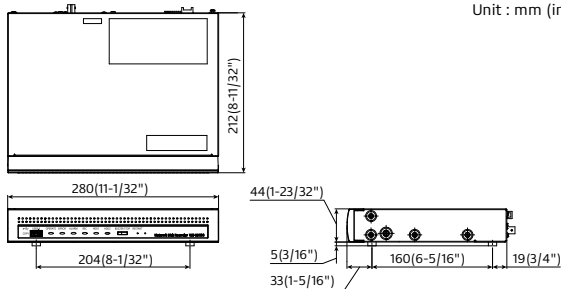

Trademarks and registered trademarks

- All other trademarks identified herein are the property of their respective owners.

Important


- Safety Precautions : Carefully read the Basic Information, Installation Guide and Operating Instructions before using this product.
- i-PRO Co., Ltd. cannot be held responsible for the performance of the network and/or other manufacturers' products used on the network.

Optional Accessories

Additional Business Intelligence Kit

WJ-NXF02W

WJ-NXF02W is a license kit intended to improve the usefulness of Network Disk Recorder WJ-NX100. After registering the WJ-NXF02W into WJ-NX100, WJ-NX100 is enabled statistical processing functions such as "People counting" and "Face matching / Age & Gender judgment". *2ch input per license



Secure Communication Kits

The Secure Communication Kits are license kits to use the security function of the network disk recorder. Each Secure Communication Kit allows the following number of cameras to be registered.

WJ-NXS01W	WJ-NXS04W
1 camera	4 cameras

WV-Q202



*When installing WJ-NX100, WV-Q202 is used for vertical installation and wall mounting. WJ-NX100 cannot be mounted in a rack using WV-Q202.

• Masses and dimensions are approximate. • Specifications are subject to change without notice.

i-PRO
The Power of Truth

i-PRO Co., Ltd.

<https://i-pro.com/>

(2A-281CA)