

Network Disk Recorder

H.265/H.264 high-throughput featuring integrated GUI and robust embedded IP security enabling a secure end-to-end PC-less surveillance solution for mission-critical applications.

Supports full data encryption streaming recording for all i-PRO cameras which comply to FIPS 140-2 Level 1 standards to keep your video secured from spoofing and snooping activities.

Built-in PoE and Space saving

- 4 PoE ports ready, no need to prepare a separate switching hub.
- Space saving in a compact size (24% reduction in capacity compared to WJ-NX200)

Secure communication and high compression recording

- Pre-installed 2.5" HDD 2 TB (Max. 4 TB)
- Significant reduction of storage space usage through H.265 and Smart Coding.
- 4 ch. camera input. Supports H.265 / H.264 mixed recordings
- Pre-installed device certificates *Secure Communication Kits are necessary.

PC-less non-VMS surveillance solution

- No annual license updates required.
- Built-in GUI and HDMI (4K/FHD) outputs
- Automatic camera configuration
- Image search with thumbnails
- High-speed copy to USB storage

High efficiency data reading/writing

- ECO-writing: Acceleration of data access (reading/writing) by original file system




Specifications

Supported Camera	Compatible vendor	i-PRO series Network cameras, ONVIF NVT conformant camera and encoder
	Supported Image Format	H.265 (HEVC), H.264, JPEG
	Supported Image Resolution (Depending on the camera)	•Aspect ratio [4 : 3] 4000x3000, 3072x2304, 2560x1920, 2048x1536, 1280x960, 800x600, 640x480 •Aspect ratio [16 : 9] 3840x2160, 3072x1728, 2560x1440, 1920x1080, 1280x720, 640x360 •Aspect ratio [1 : 1] 2992x2992, 2816x2816, 2192x2192, 2048x2048, 1280x1280 •Aspect ratio [9 : 16] 2160x3840, 1728x3072, 1440x2560, 1080x1920, 720x1280, 360x640
	Supported Audio Format	G.711 for Onvif, G.726 (ADPCM) 32 kbps, AAC-LC
Recording	Maximum Number of Cameras	MAX. 4
	Recording Mode	Event, Schedule, Emergency
	Pre-alarm Recording	Up to 15 seconds *When the delivery speed from the network camera is less than 4 Mbps.
	Sub-stream Recording	64 / 128 / 256 / 384 / 512 / 768 kbps
Main Unit Functions	Scheduled Recording Mode	4 programs, 6 time zones/day, Independent setup for each day of the week
	Frame Rate/Camera	Up to 60 fps (Depending on the camera)
	Camera Control	Pan/Tilt, Zoom, Focus, Brightness, Preset position call and program (up to 256), Auto mode, Click centering, Wheel zoom, Zoom reset, Auto Back Focus, Aux, Wiper (for WV-SUD638)
	Multiscreen Mode	[Main monitor] • Control screen 4 split screen display • Wide view screen 2 / 3 / 4 split screen display, 1 screen sequence [Sub monitor] 1 screen sequence, 4 split screen display
	Playback Control	PLAY, Rev PLAY, Pause, Stop, FF, FR, Prev Record, Next Record, Prev Image, Next Image, Go to Date, Go to Last (30 s), Time-saving playback
	Search Mode	Search criteria: Time date, Playback by designating a timeline, VMD, Thumbnail
	Copy	File Format: Original Format / MP4 Recorded data of selected cameras and time date range can be copied to USB storage.
	Camera Title	Up to 16 Characters
	Clock Display	Time: 12H/24H, Date: 5 formats
	Digital Zoom	Live / Play: 1.25x/1.5x/1.75x, 2x, 2.5x, 3x, 3.5x/4x, 5x, 6x, 7x, 8x (only for 1-screen or 4-screen)
	System Log	Operator access (500), Network error (100), Error (1,000), Event (1000), Operation (500)
	Browser GUI	System Setup
360 Camera Dewarp		Only 1ch display mode.
re-encoding		2Client
SD Memory Data Download		Images recorded in the SD card in the i-PRO series cameras can be transferred to the recorder automatically. (H.265/H.264)
Camera Control		Pan/Tilt, Zoom, Focus, Brightness, Preset position call and program (up to 256), Auto mode, Click centering, Wheel zoom, Zoom reset, Aux, Wiper (for WV-SUD638)
Playback Control		PLAY, Rev PLAY, Pause, Stop, FF, FR, Prev Record, Next Record, Prev Image, Next Image, Go to Date, Go to Last (30 s)
Search Mode		Search criteria: Time date, Event type, VMD, Camera number
Display Mode		1 / 4 screen
Image Download		File Format: Original Format / MP4 Recorded data of selected cameras and time range can be downloaded to a PC. Viewer software can be downloaded separately.
Copy		File Format: Original Format / MP4 Recorded data of selected cameras and time date range can be copied to USB storage.
Camera Title		Up to 16 characters
Clock Display		On the browser. Time: 12H/24H, Date: 5 formats
Alarm Control	Reset	
Digital Zoom	Live/Play: 2x, 4x (only for 1-screen)	
System Log	Operator access (500), Network error (100), Error (1,000), Event (1000), Operation (500)	
GUI Language	Setup page in English, French, Italian, Spanish, German, Russian, Portuguese, Thai, Simplified Chinese, Traditional Chinese, Japanese	
Required PC	CPU: Intel® Core™ i7-860 or faster, RAM : 4 GB or more, VRAM: 128 MB or more (Min. 64 MB), Microsoft® DirectX® 9.0c or later	

Alarm/Event	Alarm Source	2x Terminal inputs, 4x Camera alarms (TCP alarm notification), 128x Command alarms
	Event Mode	Off / On
	Alarm Action	Alarm recording, e-mail notification, Alarm message, Camera positioning, Terminal output, TCP alarm notification output, Buzzer, Indicator
	Alarm Control	Reset
Input / Output	Event log	1000
	Spot Output Connector	1x 1 V [p-p] / 75 Ω (BNC) NTSC / PAL (selectable in setup menu)
	Monitor (HDMI) Connector	[Main monitor] HDMI 4K UHD (3840x2160p) / 30Hz, 4K UHD (3840x2160p) / 25Hz, 1920x1080p / 60Hz, 1920x1080p / 50Hz, 1920x1080i / 60Hz, 1920x1080i / 50Hz
	Alarm / Control Terminal	Alarm: Alarm input 1- 2 ¹ , Alarm output ² Control: Time adjustment input/output ¹ , +5 V output ³ , Emergency recording input, Face matching output ⁴ Error / Warning: HDD error / Recording error output ² , Camera error output ²
Network	Mouse Connection Port	1 (USB 2.0)
	Network Port (PC)	10BASE-T / 100BASE-TX / 1000BASE-T (RJ45)
	Network Port (Camera)	4x 10BASE-T / 100BASE-TX (RJ45), PoE (IEEE802.3af compliant), PoE Budget (61.6W, 4x 15.4W/port)
	USB Storage	USB 3.0 / USB 2.0 memory, USB 3.0 / USB 2.0 connected HDD (except bus powered device)
	Network Interface	10BASE-T / 100BASE-TX / 1000BASE-T (RJ45)
	Maximum Recording Rate	96 Mbps or less
	Maximum Band Width	Total 192 Mbps or less
	Supported Protocol	IPv4: TCP/IP, UDP/IP, HTTP, HTTPS, FTP, SMTP, DNS, NTP, SNMP, RTP, RTSP, ICMP, ARP IPv6: ICMPv6
	E-mail	Upon Alarm or Warning
	No. of Simultaneous Users	16 or less
	User Registration	Up to 32 users
	User Level	3 Levels (Programmable)
Partitioning	User level - Camera (View & Control, No Access)	
Security Method	User authentication (ID and Password), Host authentication, Alteration detection, SSL/TLS	
Other Functions	Time Synchronization	Terminal (Slave), NTP (Server/Client)
	Summer Time	User definable (using menu setup)
	Remote Monitoring on Smartphone/Tablet	16 clients or less ⁵
HDD	Type	2.5 inch Serial ATA HDD, Up to 2x HDDs can be installed.
	Maximum Capacity	Up to 4 TB will be supported. ⁶ (Installed HDD : 2 TB x 1)
	RAID	RAID 1
Viewer Software	Playback Control	PLAY, Rev PLAY, Pause, FF, FR, Prev Record, Next Record, Prev Image, Next Image
	Additional Functions	Alteration detection, Save as JPEG, Two times zoom, Print, Copy, Aspect ratio switching, fish eye correction, corridor display
	Supported OS, Language	Language of the software will be English or Japanese
General Specifications	Safety / EMC Standard	cUL (UL62368-1 3Ed), FCC Part15 ClassA CE (EN62368-1, EN55032 ClassB, EN55035)
	Power Source	100 V AC to 240 V AC 50 Hz/60 Hz (included AC power adapter)
	Power Consumption	DC48 V 1.875 A approx. 81.6 W
	Ambient Operating Temperature	Main body : +5 °C to +45 °C (41 °F to 113 °F) Mouse (provided) : +5 °C to +40 °C (41 °F to 104 °F)
	Ambient Operating Humidity	5 % to 90 % (without condensation)
	Maximum Operating Altitude	2,000 m (6,562 feet) above sea level
	Dimensions	280 mm(W) x 44 mm(H) x 212 mm(D) {11-1/32 inches (W) x 1-23/32 inches (H) x 8-11/32 inches (D)}
	Mass (approx.)	When a HDD is installed: 1.9 kg (4.4 lb) When 2 HDD are installed: 2.0 kg (4.6 lb)

¹ Non-voltage make contact input, +3.3 V pull-up Approx. 23 kΩ
² Open collector output, 24 V DC, -200 mA max.
³ +5V ±0.5 V 200 mA max.
⁴ Additional Business Intelligence Kit WJ-NXF02W is necessary.
⁵ i-PRO Mobile APP is required on smartphone/tablet PC.
⁶ Please check the following URL for the latest information. (<https://i-pro.com/global/en/surveillance/training-support/documentation-database-list>)

Appearance

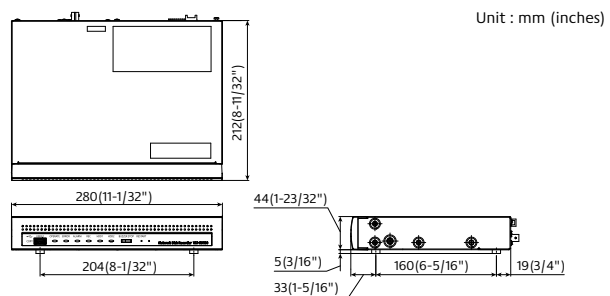

Trademarks and registered trademarks
 - All other trademarks identified herein are the property of their respective owners.

Important
 - Safety Precautions : Carefully read the Basic Information, Installation Guide and Operating Instructions before using this product.
 - i-PRO Co., Ltd. cannot be held responsible for the performance of the network and/or other manufacturers' products used on the network.

Optional Accessories

Additional Business Intelligence Kit
WJ-NXF02W
 WJ-NXF02W is a license kit intended to improve the usefulness of Network Disk Recorder WJ-NX100. After registering the WJ-NXF02W into WJ-NX100, WJ-NX100 is enabled statistical processing functions such as "People counting" and "Face matching / Age & Gender judgment". *2ch input per license

Secure Communication Kits
 The Secure Communication Kits are license kits to use the security function of the network disk recorder. Each Secure Communication Kit allows the following number of cameras to be registered.

WJ-NXS01W 1 camera	WJ-NXS04W 4 cameras
------------------------------	-------------------------------

WV-Q202 ¹
¹When installing WJ-NX100, WV-Q202 is used for vertical installation and wall mounting. WJ-NX100 cannot be mounted in a rack using WV-Q202.

• Masses and dimensions are approximate. • Specifications are subject to change without notice.

