

New U-series compact network camera with enhanced functions and affordability

4MP Outdoor Dome Network Camera

The new U series is an entry model that achieves high quality and reliability at an affordable price to meet the needs of a wide range of customers. The compact and slim design allows it to be installed in a various locations.

It newly supports ONVIF G / S / T profile and H.265 / H.264, and can be widely used for connecting various VMS and recorders. It also comes pre-installed with secure certificates, enabling device authentication and end-to-end communication encryption to counter the threat of advanced cyberattacks.

Key features

- Compact and slim design allows installation in various locations
- Compliant with ONVIF G / S / T profile and H.265 / H.264, and can support a wide range of connections to VMS and recorders
- Uses "Easy Kitting Packing" that allows you to set the camera without removing it from the box
- Strengthen cyber security by pre-installing digital certificates issued by a third party organization (GlobalSign)

Key i-PRO Spec.

- 5MP Sensor
- 2688×1520 pixel image up to 30fps
- iA (intelligent Auto)
- Super Dynamic 102dB
- Color night vision (0.019 to 0.3 lx)
- H.265 Smart Coding
- Corridor mode
(90 degrees or 270 degrees in image rotation)
- Built-in IR LED
- ONVIF® Profile G / S / T
*ONVIF is a trademark of ONVIF, Inc.
- Genetec Stratocast compatible

Industry examples

- Safe Cities
- Transportation (Airport / Train, Subway station)
- Bank (ATM, Entrance)
- Retail / Logistics / Education / Hospital / Building





Specifications

Camera	Image Sensor	Approx. 1/2.7 type CMOS image sensor			
	Effective pixels	Approx. 5.2 megapixels, 2688(H)×1944(V)			
	Minimum Illumination	Color : 0.3 lx, BW: 0.12 lx (50IRE, F2.0, Maximum shutter: Off (1/30s), AGC: 11) BW : 0 lx (50IRE, F2.0, Maximum shutter: OFF (1/30 s), AGC: 11, when the IR LED is lit) Color : 0.019 lx, BW: 0.0075 lx (50IRE, F2.0, Maximum shutter: max. 16/30s, AGC: 11) ^{*1}			
	White Balance	ATW1/ ATW2/ AWC			
	Maximum shutter	[30fps mode] Max. 1/10000 s to Max. 16/30 s [25fps mode] Max. 1/10000 s to Max. 16/25 s			
	Intelligent Auto	On / Off			
	Super Dynamic	On / Off, The level can be set in the range of 0 to 31.			
	Dynamic Range	Max.102 dB (Super Dynamic: On, Level: 31)			
	Adaptive Black Stretch	The level can be set in the range of 0 to 255.			
	Back light compensation / High light compensation	BLC/ HLC/ Off, The level can be set in the range of 0 to 31. The level can be set in the range of 0 to 31. (only when Super Dynamic / Intelligent auto: Off)			
	Fog compensation	On / Off, The level can be set in the range of 0 to 8. (only when Intelligent auto / auto contrast adjust: Off)			
	Maximum gain (AGC)	The level can be set in the range of 0 to 11.			
	Color/BW (ICR)	Off/ On (IR Light Off) / On (IR Light On) / Auto1 (IR Light Off) / Auto2 (IR Light On) / Auto3 (SCC)			
	IR LED Light	High/ Middle/ Low/ Off Maximum irradiation distance: 20 m (Approx. 65 ft)			
	Digital Noise Reduction	The level can be set in the range of 0 to 255.			
	Video Motion Detection (VMD)	On / Off, 4 areas available			
	Scene Change Detection (SCD)	On / Off, 1 area available			
	Privacy Zone	On / Off, Up to 8 zones available			
	VIQS	On / Off, Up to 8 zones available			
	Image rotation	0° (Off) / 90° / 180° (Upside-down) / 270°			
Camera Title (OSD)	On / Off, Up to 20 characters (alphanumeric characters, marks)				
Lens	Focal length	3.2 mm(1/8 inches)			
	Optical zoom	1x			
	Extra zoom	1.0x - 1.3x(when resolution is 1920x1080)			
	Digital (electronic) zoom	Choose from 3 levels of x1, x2, x4			
	Angular Field of View	[16 : 9 mode] * [4:3 mode] is not supported. Horizontal : 100°, Vertical : 54°			
DORI	Maximum Aperture Ratio	1 : 2.0			
	Focus range	1 m (39-3/8 inches) - ∞			
	Detect (25ppm / 8ppf)	43.0 m / 141.0 ft			
	Observe (62.5ppm / 19ppf)	17.2 m / 56.4 ft			
Recognize (125ppm / 38ppf)	8.6 m / 28.2 ft				
Identify (250ppm / 76ppf)	4.3 m / 14.1 ft				
Adjusting Angle		Horizontal (PAN) angle: -175° ~ +175°, Vertical (TILT) angle: -30° ~ +80° Azimuth (YAW) angle: ±100°			
Browser GUI	Camera Control	Brightness			
	GUI / Setup Menu Language	English, Italian, French, German, Spanish, Portuguese, Russian, Chinese, Japanese			
Network	Network IF	10Base-T / 100Base-TX, RJ45 connector			
	Resolution	[16:9 mode(2688x1520 30fps mode)], [16:9 mode(2688x1520 25fps mode)] 2688×1520, 1920×1080, 640×360, 320×180			
	H.265/H.264	[16:9 mode(30fps mode)], [16:9 mode(25fps mode)] 2560×1440, 1920×1080, 640×360, 320×180 *[4:3 mode] is not supported.			
	Transmission Mode	Constant bit rate / VBR / Frame rate / Best effort			
	Transmission Type	Unicast port(AUTO) / Unicast port(MANUAL) / Multicast			
Max. frame rate for each stream ^{*2}	Stream(1)	Stream(2)	Stream(3)	JPEG(1)	JPEG(2)
	2688x1520(30fps)	Off	Off	2560x1440(1fps)	1920x1080(1fps)
	2560x1440(30fps)	640x360(30fps)	Off	2560x1440(1fps)	1920x1080(1fps)
	1920x1080(30fps)	1920x1080(30fps)	640x360(10fps)	2560x1440(1fps)	1920x1080(1fps)
JPEG	Image Quality	10 steps			

Network	Smart Coding	GOP(Group of pictures) control: On(Frame rate control) / On(Advanced) / On(Mid.) / On(Low) / Off *Frame rate control and Advanced are only available with H.265. AUTO VIQS: On / Off
	Audio Compression	—
Alarm	Audio transmission mode	—
	Supported Protocol	IPv6 : TCP/IP, UDP/IP, HTTP, HTTPS, SSL/TLS, SMTP, DNS, NTP, SNMPv1/v2/v3, DHCPv6, RTP, MLD, ICMP, ARP, IEEE 802.1X, DiffServ, MQTT ^{*3} , LLDP ^{*3} IPv4 : TCP/IP, UDP/IP, HTTP, HTTPS, SSL/TLS, RTSP, RTP, RTCP, SMTP, DHCP, DNS, DDNS, NTP, SNMPv1/v2/v3, UPnP, IGMP, ICMP, ARP, IEEE 802.1X, DiffServ, MQTT ^{*3} , LLDP ^{*3}
	No. of Simultaneous Users	Up to 14 users (Depends on network conditions)
	SDXC/SDHC/SD Memory Card	H.265/H.264 recording: Manual REC / Alarm REC (Pre/Post) / Schedule REC Compatible SDXC/SDHC/SD Memory Card : microSDXC memory card: 64 GB, 128 GB, 256 GB, 512 GB microSDHC memory card: 4 GB, 8 GB, 16 GB, 32 GB microSD memory card: 2 GB
Mobile Terminal Compatibility	iPad, iPhone, Android™ terminals	
ONVIF [®] Profile	G / S / T	
Input/Output	Alarm Source	VMD alarm, SCD alarm, Command alarm
	Alarm Actions	SDXC/SDHC/SD memory recording, E-mail notification, HTTP alarm notification, Indication on browser, TCP alarm notification output
General	Monitor Output(for adjustment)	—
	Audio input	—
General	Audio Output	—
	External I/O Terminals	—
	Safety	UL (UL60950-1), c-UL (CSA C22.2 No.60950-1), CE, IEC60950-1
	EMC	FCC (Part15 ClassA), ICES003 ClassA, EN55032 ClassB, EN55024
	Power Source and Power Consumption	PoE (IEEE802.3af compliant) Device: DC48 V 110 mA, Approx. 5.3 W (Class 2 device)
	Ambient Operating Temperature	-30 °C to +50 °C (-22 °F to +122 °F) {Power On range: -20 °C to +50 °C (-4 °F to +122 °F)}
	Ambient Operating Humidity	10 to 100 % (no condensation)
	Anti-Condensation System	Temish element
	Water and Dust Resistance ^{*4}	IP66 (IEC 60529), Type 4X (UL50E), NEMA 4X compliant
	Shock Resistance	IK10 (IEC 62262)
	Wind Resistance	Up to 40 m/s {approx. 89 mph}
	Dimensions	ø109 mm (W) x 62 mm (H) {ø4-9/32 inches x 2-7/16 inches (H)} Dome radius 30.5 mm (1-3/16 inches)
	Mass (approx.)	270 g [0.60 lbs.]
	Finish	Main body : Aluminum die cast / Polycarbonate resin, i-PRO white Outer fixing screws : Stainless steel (Corrosion-resistant treatment) Dome cover : Polycarbonate resin, Clear

*1 Converted value
*2 Smart Coding(GOP and AUTO VIQS) is not available when setting 30fps.
*3 It may be necessary to upgrade the firmware to use these protocols.
*4 Only when installation work is properly performed according to the Installation Guide and appropriate waterproof treatment is performed.



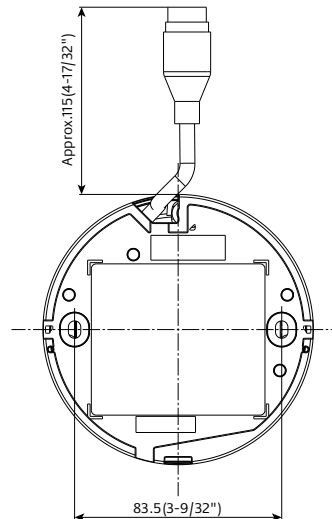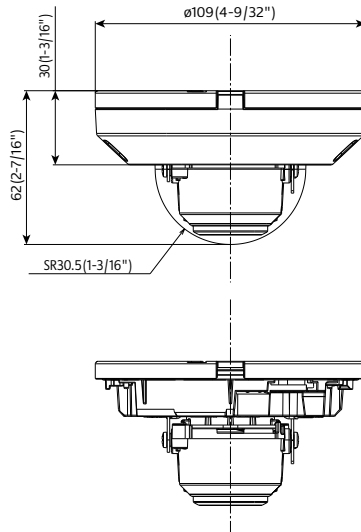




Appearance



Unit : mm (inches)

Optional Accessories

Mount Bracket / Other

		WALL		POLE	CORNER
		1	2	1	1
combination	Wall Mount Bracket WV-QWL500-W (White) 	Base bracket WV-QJB502-W (White) 	Pole Mount Bracket PAPM4W (White) 	Corner Mount Bracket PACA4W (White) 	
	Adapter Box WV-QJB500-W (White)  *If needed.	/	Wall Mount Bracket WV-QWL500-W (White) (+ WV-QJB500-W) 	Wall Mount Bracket WV-QWL500-W (White) (+ WV-QJB500-W) 	

		HANGING	CEILING	DOUBLE/OCTAGON GANG BOX
		1	1	1
combination	Ceiling Mount Bracket WV-QCL101-W *1 (White)  *For indoor installation only.	Base bracket WV-QJB502-W (White) 	Gangbox Adapter WV-QAT502-W (White) 	
	This bracket requires 1 1/2" NPT pipe.			

*1: It's possible to be used on the camera side and ceiling side. If used on both side, 2pieces are required.

Dome Cover



Trademarks and registered trademarks

- iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries.
- Android is a trademark of Google LLC.
- ONVIF is a trademark of ONVIF, Inc.
- All other trademarks identified herein are the property of their respective owners.

Important

- Safety Precautions : Carefully read the Basic Information, Installation Guide and Operating Instructions before using this product.
- i-PRO Co., Ltd. cannot be held responsible for the performance of the network and/or other manufacturers' products used on the network.

• Masses and dimensions are approximate. • Specifications are subject to change without notice.